

# Keystone Chandelier

CC1179, CC11818, CC1196, CC1208 | 1.1

## VISUAL COMFORT & Co.

STUDIO COLLECTION

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

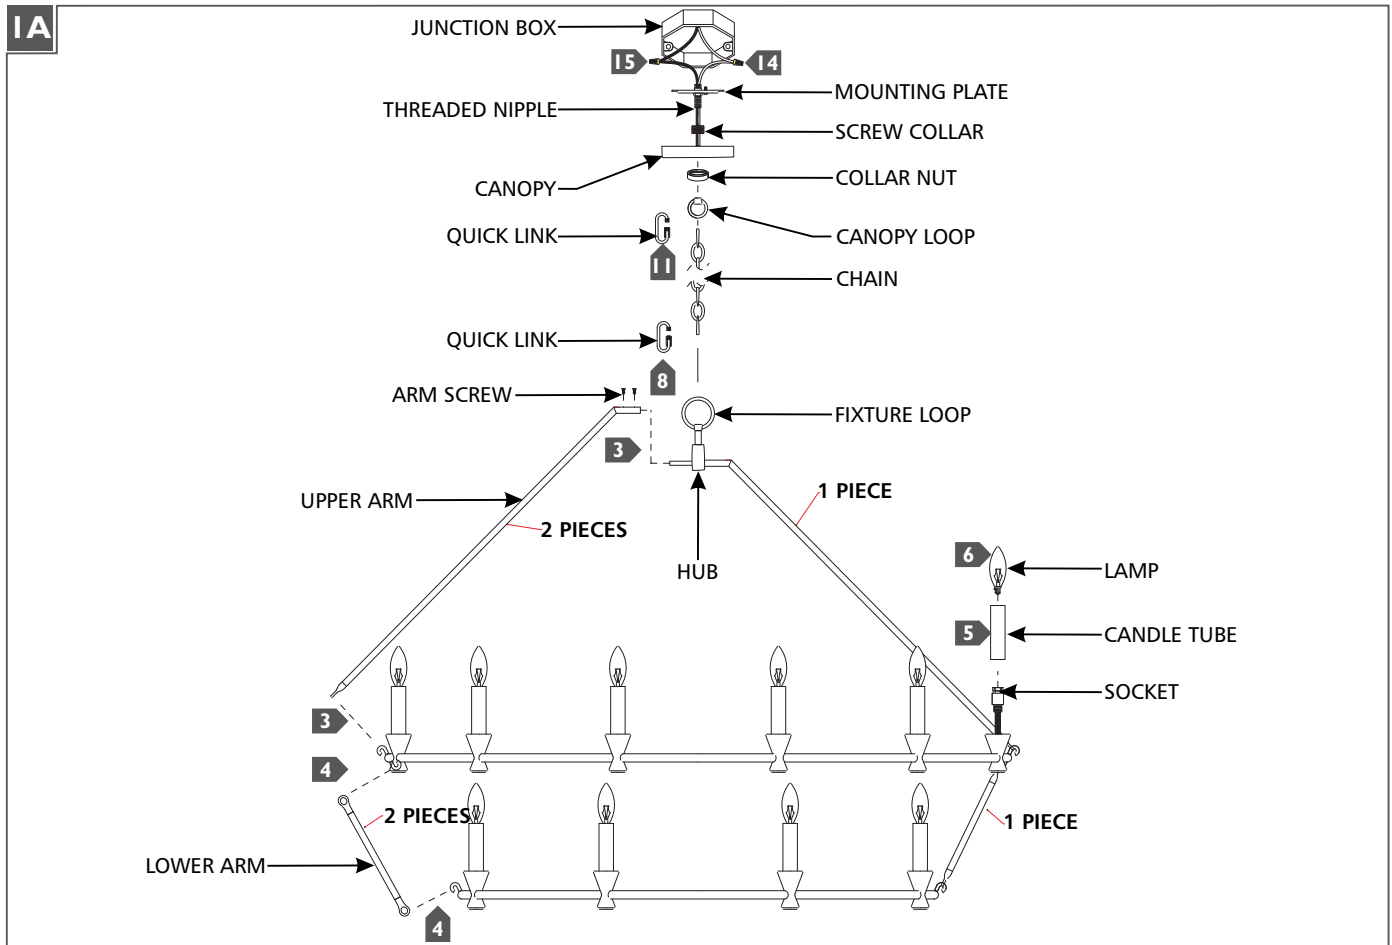

- 1 If necessary, screw the short end of the threaded nipple tightly onto the mounting plate and the screw collar onto the threaded nipple.
- 2 Secure the mounting plate to the junction box.
- 3 Install the upper arms to the hub using the arm screws, then hook the other end of the arm to the upper tier.
- 4 **For two-tier fixtures:** Install the lower arms by hooking one end to the upper tier and the other end to the bottom tier.
- 5 Install the candle tube by sliding it over the socket.
- 6 Screw the lamp into the socket. Refer to the label on the lamp socket for Max Wattage information.
- 7 Determine the wanted height of the fixture and remove a portion of the chain from the bottom by opening a link with pliers.
- 8 Install a quick link to bottom end of the chain, then secure the quick link onto the fixture loop.
- 9 Unscrew the collar nut from the screw collar, then install the collar nut, and the canopy onto the chain (in that order).
- 10 Install the canopy loop by screwing it onto the threaded nipple so that it is underneath the screw collar.
- 11 Install the other quick link onto the remaining end of the chain, then secure the quick link onto the canopy loop.
- 12 Weave the cord through the chain, collar nut, canopy, canopy loop, threaded nipple, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 13 Connect the fixture to a suitable ground in accordance to local electrical codes.
- 14 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 15 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 16 Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place by screwing the collar nut onto the screw collar.

**SAVE THESE INSTRUCTIONS!**

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347

**[www.generationlighting.com](http://www.generationlighting.com)**

© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.