


Assembly Instructions For F2314/3, F2315/4 (E) 11/07

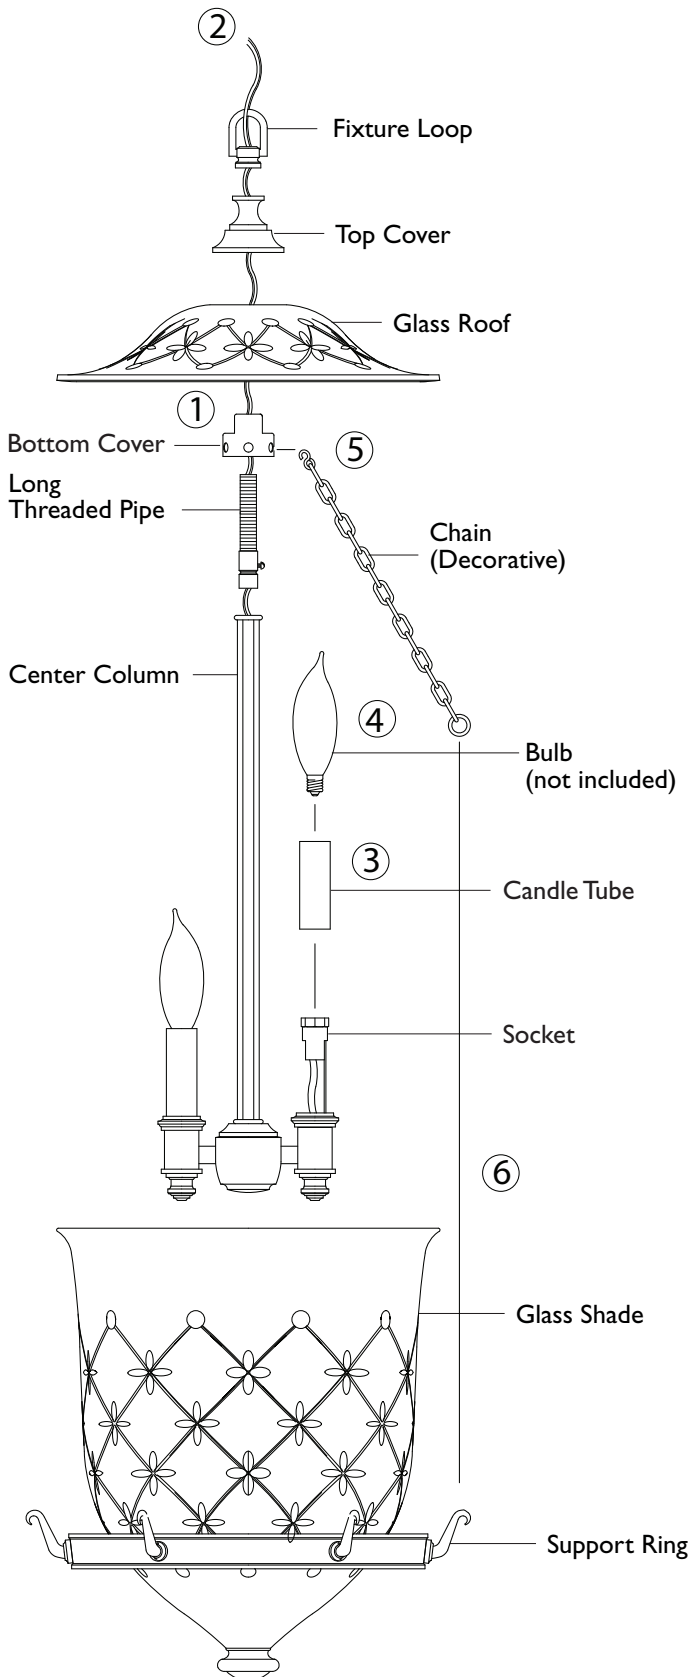

**IMPORTANT
TURN OFF THE POWER AT THE MAIN FUSE OR
CIRCUIT BREAKER BOX
BEFORE STARTING INSTALLATION**

Carefully unpack and identify all parts before assembly.
Bulb not included.

1. A. Slip long threaded pipe and bottom cover through fixture wires. Then install threaded pipe by screwing into swivel located at top of center column.
B. Sit bottom cover on top of swivel.
C. Slip glass roof through the fixture wires and then sit on top of bottom cover.
D. Slip top cover and fixture loop through fixture wires. Place top cover on top of glass roof and secure all together by fastening fixture loop onto protruding threaded pipe.
2. Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture, then hire a qualified electrician to create one.
3. Slip candle tube onto sockets.
4. Install bulbs (not included). See relamping label located near socket area for type and maximum allowed wattage.
5. Install top of chain by inserting s-hook into openings located on the side of bottom cover.
6. Sit glass shade onto inside of support ring. Then while firmly holding onto the support ring, hook onto the o-ring on the bottom of each chain.



LIGHTING™