


Assembly Instructions For



FES1302/3 (E) 11/24/08

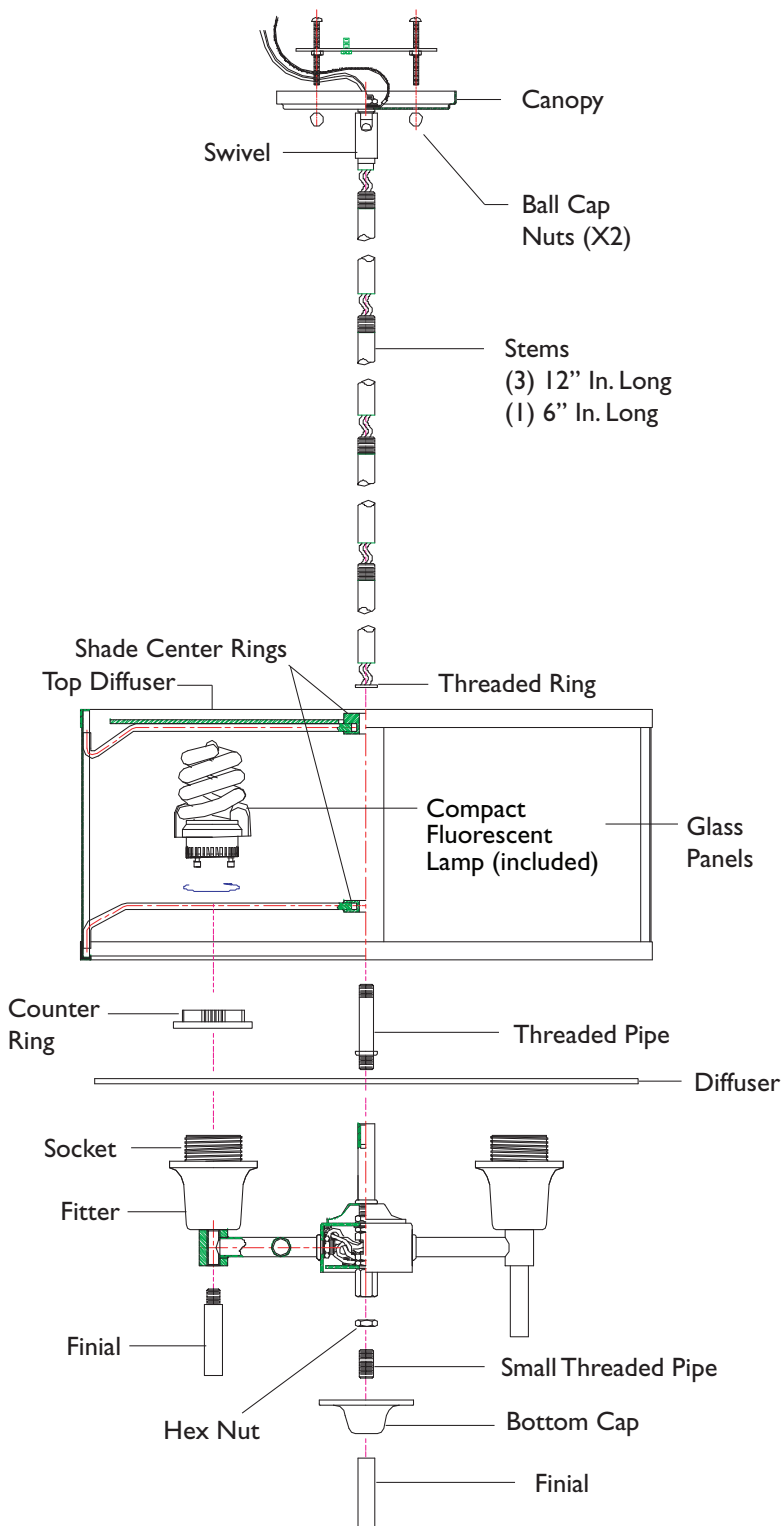

**IMPORTANT
TURN OFF THE POWER AT THE MAIN FUSE OR
CIRCUIT BREAKER BOX
BEFORE STARTING INSTALLATION**

Carefully unpack and identify all parts before assembly. Bulb not included.

1. Secure the bottom diffuser with threaded pipe. Then screw the threaded pipe into the center pipe. Place diffuser over sockets. Next thread the center pipe assembly through the shade center rings and difuser. Secure with a threaded ring. Then screw bottom end of stem assembly onto the threaded pipe.
2. Install stems:
 - A. Choose desired installation height from dimensions shown in above diagram. If mounting without any stems, then jump to below step D.
 - B. Thread fixture wires through each stems to be used. Note correct position of stems from left diagram. Screw all stem together until secure.
 - C. Install bottom end of stem assembly by screwing into top of fixture.
 - D. Thread fixture wires through swivel. Then install swivel by screwing onto top end of stem assembly (or directly onto top of fixture if installing without any stems).
 - E. Measure 6" of wires from end of fixture plate and cut off remaining wires. Split wires and strip off 3/4" (20 mm) of insulation from each end.
3. Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture than hire a qualified electrician to create one.
4. Install shade onto fitters by fastening with spacer tube and counter ring.
5. Install compact fluorescent lamp by inserting into slots in socket base, and then twist and lock. See illustration.
6. Install finials onto fitters.
7. Screw hex nut onto small threaded pipe and screw into coupler of the fixture housing. Thread bottom cap onto small threaded pipe and secure with finial.

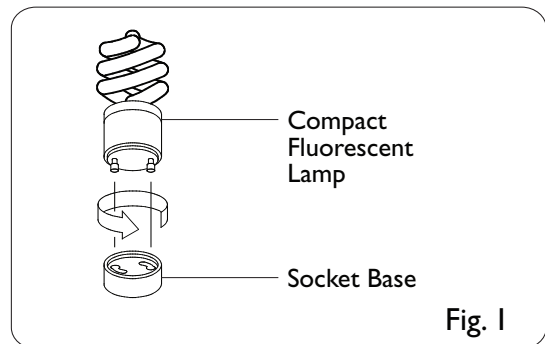

**MURRAY
FEISS**
Generation Brands™